



पाणिनी गाउँपालिका

Panini Rural Municipality

गाउँ कार्यपालिकाको कार्यालय

Office of the Rural Municipal Executive

पत्र सङ्ख्या/Letter No.: २०८२/०८३

चलानी नं./Ref.No.:



दुर्गाफाँट, अर्घाखाँची

Durgaphant, Arghakhanchi

लुम्बिनी प्रदेश, नेपाल

Lumbini Province, Nepal


अधुरो सभाहल निर्माणका लागि कोटेशन पेस गर्ने सम्बन्धी सूचना !

(प्रथम पटक प्रकाशित मिति: २०८३/०१/०८)

पाणिनी गाउँपालिकाको आ.व. २०८२/०८३ को वार्षिक स्वीकृत विकास कार्यक्रमबमोजिम यस गाउँपालिकाको वडा नं. ७ स्थित अधुरो सभाहल निर्माण गर्नु पर्ने भएकाले यस कार्यालयमा सूचीकृत/नवीकरण भएका निर्माण व्यवसायीहरूबाट यो सूचना प्रकाशन भएको मितिले ७ (सात) दिन भित्र आवश्यक कागजातसहित कोटेशन (BOQ) पेस गर्नुहुन यो सूचना प्रकाशन गरिएको छ । साथै उक्त कार्यको BOQ यसै साथ संलग्न रहेको छ ।

(सुवर्ण खनाल)

प्रमुख प्रशासकीय अधिकृत

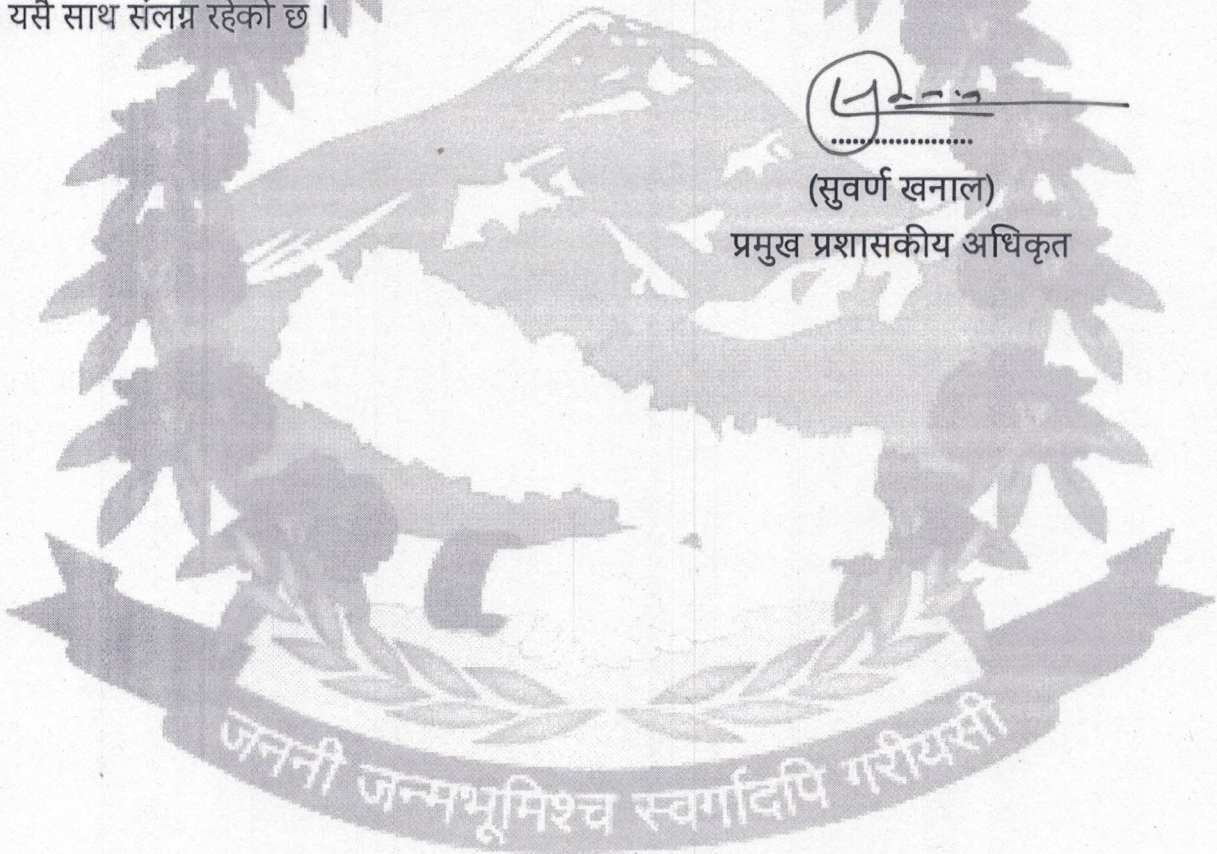



पाणिनी गाउँपालिका
गाउँपालिकाको कार्यालय
दुर्गाफाँट, अर्घाखाँची

बिल अफ क्वान्टिटी (BoQ)

कार्याक्रम :

यातयात पूर्वाधार

सभाहल मर्मत पाणिनी ७

स्थान: पाणिनी गाउँपालिका वार्ड नं ७

आ.व. २०८२/०८३

क्र.सं.	कामको विवरण	परिमाण	इकाई	दर रेट अंकमा	दर रेट अक्षरमा	मूल्य	कैफियत
1	UPVC Door/ Windows	२३.६३ प्रति ब.मि					
२	झ्यालमा ३ मिमि X २० मिमि को Flat राखि ८ मिमि को Square Rod १० Cm Spacing मा राखी ग्रिल तयार गर्ने कार्य पेन्टिङ सहित (एक कोट रैड अक्साईड प्राईमर सहित १ कोट पेन्टिङ गर्ने कार्य)	१८.९० घ.मि.					
	Machine made brick masonry works along with supplying bricks making cement sand mortar and construction of brick wall including haulage distance upto 30m (First Class Brick Work with 1:6 Cement sand mortar)	१.०८ घ. मि.					
	12.5 mm thick cement plaster in wall Cement sand Mortar (1:6) (sand-crusher, cement-Opc)	९.४० ब.मि					



५	<p>Earth work in excavation of foundation of structures Using Machine in Ordinary Soil including construction of shoring and bracing, removal of stumps and other deleterious matter and backfilling with approved Material as per Drawing and Technical Specifications.(Manually)</p>	१३.५२ घ. मि.		
६	<p>Providing and laying of hand pack Stone soling with 150 to 200 mm thick stones and packing with smaller stone on prepared surface as per Drawing and Technical Specifications. Stone Locally Available</p>	०.३२ घ. मि.		
७	<p>Cement concrete work M10 (1:3:6) in foundation, wall including collection of materials and a lead of 30m in (Machine) (sand,aggregate-river/quarry, cement-Pcc)</p>	०.७२ घ. मि.		
८	<p>Stone (rubble) masonry work upto 5 m height including collection of hard block stones, preparation of cement mortar (1:6) including works and a lead of 10 m.</p>	८.०५ घ. मि.		
९	<p>Cement concrete work M20 (1:1.5:3) in Superstructure including collection of materials and a lead of 30m in (Machine)(sand,aggregate-crusher cement- (Once)</p>	०.५२ घ. मि.		
१०	<p>Providing and laying , fitting and placing un-coated Mild steel / HYSD reinforcement complete in foundation as per drawing and technical specification</p>	४२.०३ क. मि.		



Handwritten signature and initials.

११	Making plywood formwork including supply and selection of materials fixing, nailing according to drawing, placing separators, dismantling forms and hauling upto 30m distance.	५.२० व.मि			
१२	प्यान पोर्सिलिन स्लेज्ड 16" x 22"	२.०० No.			
१३	HDPE Pipe (NS -40) PN 6 (6 Kg/Cm2)	१०.००	Rm		110mm
		जम्मा अड्क भ्याट बाहेक			
		भ्याट रकम @13%			
		जम्मा अड्क भ्याट सहित			

फर्मको नाम:
ठेगाना:
दस्ताखत: