



पाणिनी गाउँपालिका

Panini Rural Municipality

गाउँ कार्यपालिकाको कार्यालय

Office of the Rural Municipal Executive

दुर्गाफाँट, अर्घाखाँची

Durgaphant, Arghakhanchi

लुम्बिनी प्रदेश, नेपाल

Lumbini Province, Nepal

पत्र सङ्ख्या/Letter No.: २०८२/०८३

चलानी नं./Ref.No.:



मिति:- २०८३/०१/२४


ने.सं. ११४६ बछलागा: ५, बिहिबार

कोटेशन पेस गर्ने सम्बन्धी सूचना !

पाणिनी गाउँपालिकाको आ.व. २०८२/०८३ को वार्षिक स्वीकृत विकास कार्यक्रमबमोजिम यस गाउँपालिकाको वडा नं. ६ स्थित वडा कार्यालयको अधुरो कार्य निर्माण गर्नु पर्ने भएकाले यस कार्यालयमा सूचीकृत/नवीकरण भएका फर्महरूबाट सूचना प्रकाशन भएको मितिले ७ (सात) दिन भित्र आवश्यक कागजातसहित कोटेशन (BOQ) पेस गर्नुहुन सम्बन्धित सबैको जानकारीका लागि यो सूचना प्रकाशन गरिएको छ । साथै उक्त कार्यको BOQ यसै साथ संलग्न रहेको छ।

(सुवर्ण खनाल)

प्रमुख प्रशासकीय अधिकृत

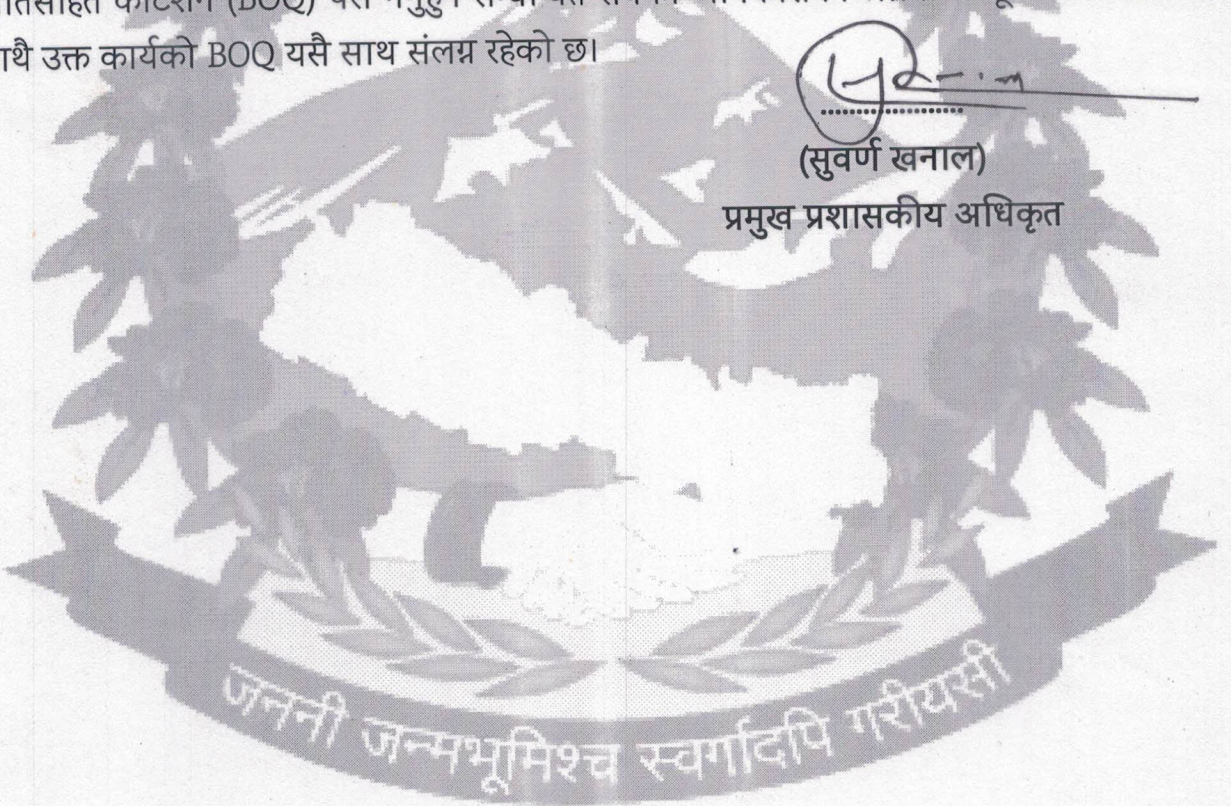



कार्यक्रम :

यातयात पूर्वधार

योजनाको नाम वडा कार्यलयको अधुरो कार्य निर्माण

स्थान:

पाणिनी गाउँपालिका वडा नं. ६

पाणिनी गाउँपालिका
गाउँपालिकाको कार्यालय
दुर्गाफाँट, अर्घाखाँची

बिल अफ क्वान्टिटी (BoQ)






प्रशासक अधिकृत
मुस्ताङ

आ.व. २०८२/०८३

क्र.सं	कामको विवरण	परिमाण	इकाई	दर रेट अंकमा	दर रेट अक्षरमा	मूल्य	कैफियत
1	Roadway Excavation in all types of soil as per drawing and technical specification, including removal of stumps and other deleterious matter, with all lifts and lead as per Drawing and instruction of the Engineer. Manually	9.37	Cum				
2	Providing and laying of hand pack Stone soling with 150 to 200 mm thick stones and packing with smaller stone on prepared surface as per Drawing and Technical Specifications. Stone Locally Available	0.62	Cum				

3	Cement concrete work M10 (1:3:6) in foundation, wall including collection of materials and a lead of 30m in (Manual) (sand, aggregate-river/quarry, cement-Pcc)	0.62 Cum		
4	Stone (rubble) masonry work upto 5 m height including collection of hard block stones, preparation of cement mortar (1:4) including weep hole of 4inch pipe per square meter, pointing works and a lead of 10 m.	4.69 Cum		
5	Machine made brick masonry works along with supplying bricks making cement sand mortar and construction of brick wall including haulage distance upto 30m (First Class Brick Work with 1:4 Cement sand mortar)	2.37 Cum		
	12.5 mm thick cement plaster in wall Cement sand Mortar (1:4) (sand-crusher, cement-Opc)	57.28 Sqm		



Handwritten signature and a blue stamp with text in Hindi.



7	<p>Providing and laying, fitting and placing un-coated Mild steel / HYSD reinforcement complete in foundation as per drawing and technical specification</p>	77.93 KG			
8	<p>Cement concrete work M15 (1:2:4) in foundation, wall including collection of materials and a lead of 30m in (Manual) (sand, aggregate-river/quarry, cement-Pcc)</p>	1.96 Cum			
	<p>Porcelaine glazed tiles work for wall in 1:4 c/m with finishing (sand-crusher, cement opc, and use white cement in filler)</p>	4.44 Sqm			
	<p>Sanitary item</p>				
	<p>UPVC Door/ Windows</p>				
	<p>Door Frame (80/50mm), door frame 112/42 mm door sash 80*200mm pannel</p>	29.05 प्रति ब. फि.			

