



पाणिनी गाउँपालिका

Panini Rural Municipality

गाउँ कार्यपालिकाको कार्यालय

Office of the Rural Municipal Executive

दुर्गाफाँट, अर्घाखाँची

Durgaphant, Arghakhanchi

लुम्बिनी प्रदेश, नेपाल

Lumbini Province, Nepal

पत्र सङ्ख्या/Letter No.: २०८२/०८३

चलानी नं./Ref.No.:



मिति: २०८३/०१/२३


ने.सं. ११४६ बछलागा: ४, बुधबार

कोटेशन पेस गर्ने सम्बन्धी सूचना !

पाणिनी गाउँपालिकाको आ.व. २०८२/०८३ को वार्षिक स्वीकृत विकास कार्यक्रमबमोजिम यस गाउँपालिकाको वडा नं. ६ स्थित पधेरा, दहकाचौर, बोखर, ढाव, ठूलापोखरा, पधेरा रिङ्गरोड सडक र विभिन्न स्थानमा नयाँ सडक निर्माण गर्नु पर्ने भएकाले यस कार्यालयमा सूचीकृत/नवीकरण भएका फर्महरुबाट सूचना प्रकाशन भएको मितिले ७ (सात) दिन भित्र आवश्यक कागजातसहित कोटेशन (BOQ) पेस गर्नुहुन सम्बन्धित सबैको जानकारीका लागि यो सूचना प्रकाशन गरिएको छ । साथै उक्त कार्यको BOQ यसै साथ संलग्न रहेको छ।

(सुवर्ण खनाल)

प्रमुख प्रशासकीय अधिकृत

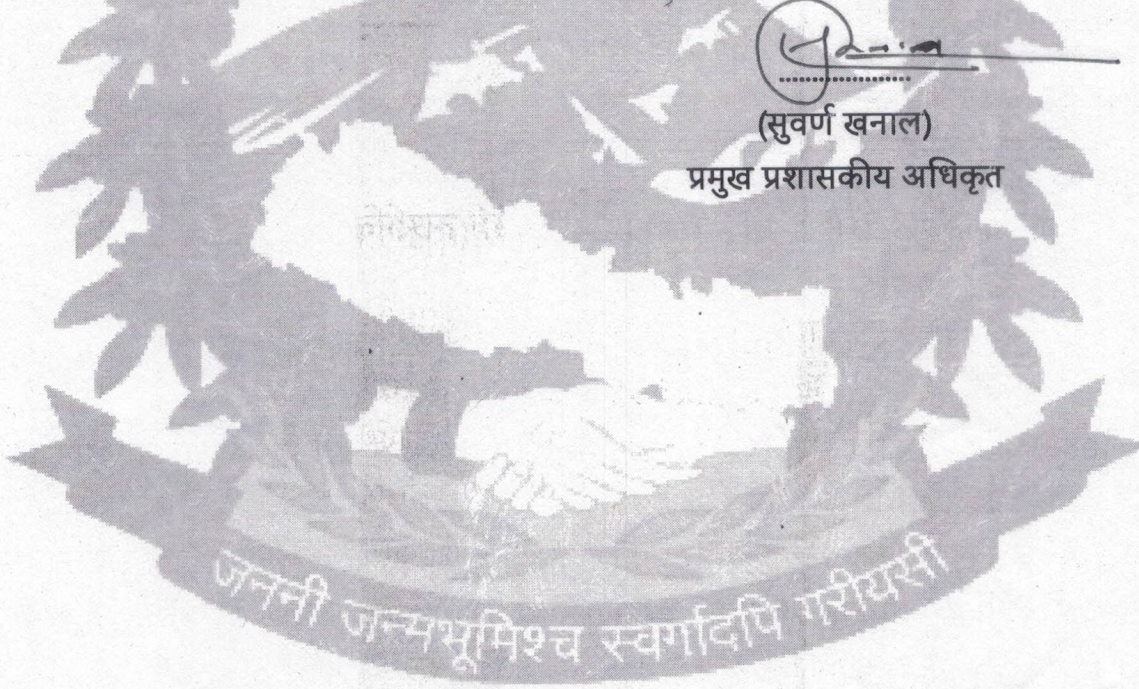



पाणिनी गाउँपालिका
गाउँपालिकाको कार्यालय
दुर्गाफाँट, अर्घाखाँची

बिल अफ क्वान्टिटी (BoQ)

कार्याक्रम :

यातयात पूर्वाधार

योजनाको नाम :

पधेरा, दहकचौर, बोखर, ढाव, ठुलापोखरा, पधेरा रिंगरोड सडक र विभिन्न स्थानमा नयाँ सडक निर्माण पाणिनी ६

स्थान:

पाणिनी गाउँपालिका वडा नं. ६

आ.व. २०८२/०८३

क्र.सं.	कामको विवरण	परिमाण	इकाई	दर रेट अंकमा	दर रेट अक्षरमा	मूल्य	कैफियत
1	Road way Excavation Using Machine in all types of soil as per Drawing and technical specifications including removal of stumps and other deleterious matter, all lifts and lead as per Drawing and instruction of the Engineer.	2766.80	Cum				
2	Providing and laying of hand pack Stone soling with 150 to 200 mm thick stones and packing with smaller stone on prepared surface as per Drawing and Technical Specifications. Stone Locally Available	18.81	Cum				
3	Providing and laying of Plain Cement Concrete/Reinforced Cement Concrete M 15 (or 1:2:4 for nominal mix) in Foundation complete as per Drawing and Technical Specifications. (sand, aggregate-river/quarry, cement-Pcc)	27.87	Cum				

4	Providing and laying , fitting and placing un-coated Mild steel / HYSD reinforcement complete in foundation as per drawing and technical specification	31.60	KG				
5	Providing and laying plum concrete (boulder mix concrete) as per drawing and specification '60% M15 concrete and 40% boulder stone Manually Mixed	5.20	Cum				
6	Making plywood formwork including supply and selection of materials fixing, nailing according to drawing, placing separators, dismantling forms and hauling upto 30m distance.	8.67	Sqm				
जम्मा अङ्क भ्याट बाहेक							
भ्याट रकम @13%							
जम्मा अङ्क भ्याट सहित							

फर्मको नाम:

ठेगाना:

दस्तखत:

(Handwritten signature)

